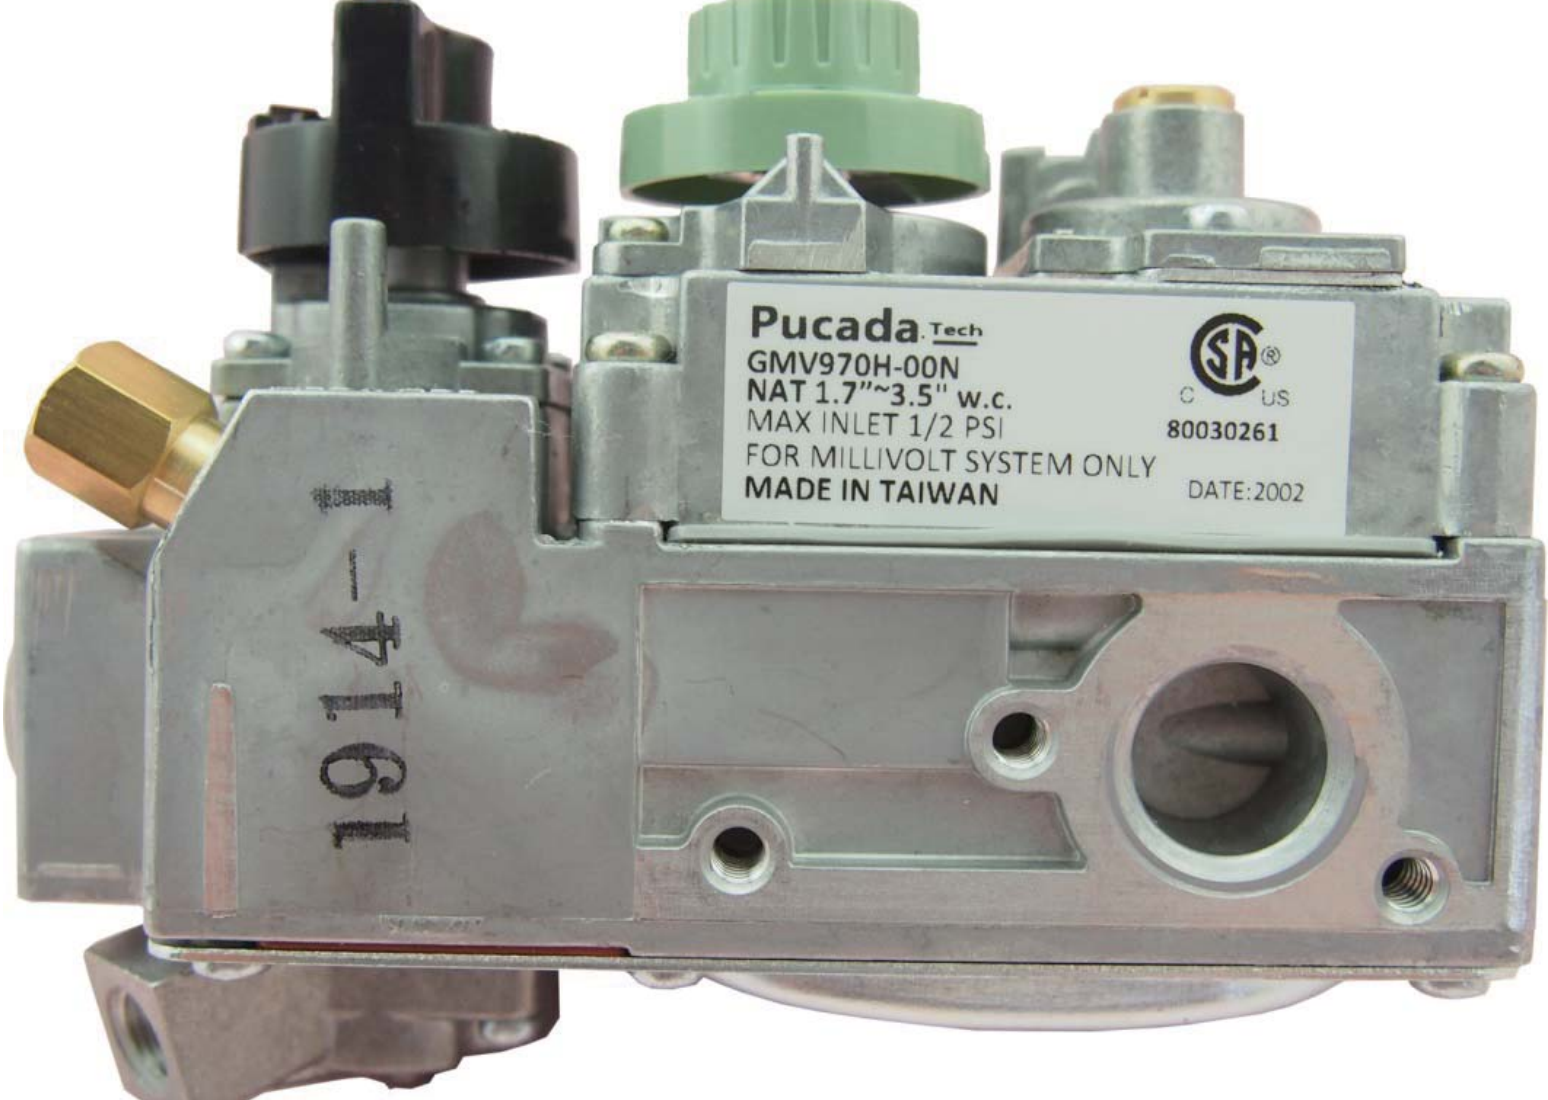









Data Sheet - GMV970H Series

| | | |
|--|--|--|
| <p>Photo 照片</p> |  | |
| <p>Model No. 型號</p> | <p>GMV970H</p> | |
| <p>Type of Valve 閥體類別</p> | <p>Hydraulic Valve (With temperature knob to adjust gas flow capacity) 恆溫閥 (可手動調整瓦斯流量)</p> | |
| <p>Type of Gas 瓦斯類別</p> | <p>NAT. or LPG 天然氣 或 液化氣</p> | |
| <p>Certificate 認證</p> | <p>CSA  US</p> | |
| <p>Electric Rating 電氣特性</p> | <p>Connected with thermocouple 接熱電偶</p> | |
| <p>Gas Regulation Funcion 穩壓功能</p> | <p>With gas regulation function 有穩壓功能</p> | |
| <p>Pilot Solenoid Valve Connection Method 母火安全閥相接方式</p> | <p>鎖牙式 : M8 x 1.0 或 11/32-32-2TUNS Thread in : M8 x 1.0 or 11/32-32-2TUNS</p> | |
| <p>Pilot Valve Activate / Shut off Specification 母火安全閥開啟 / 關閉特性</p> | <p>>= 150mA, Pilot Solenoid Valve Activates 達到 150mA 時母火電磁閥吸住</p> | |
| <p></p> | <p>< 35 ~75mA, Pilot Solenoid Valve Shut Off 低於 35~75mA 時母火電磁閥關閉</p> | |
| <p>Max. Inlet Pressure Value 最大入氣壓</p> | <p>1/2 psi (14"w.c.)</p> | |
| <p>Default Outlet Pressure Value 出廠預設出氣壓力值</p> | <p>NAT. : 1.7"w.c. ~ 3.5"w.c. (1.5"w.c. ~ 4.5"w.c. available) 天然氣 : 1.7"w.c. ~ 3.5"w.c. (1.5"w.c. ~ 4.5"w.c. 可選)</p> | |
| <p></p> | <p>LPG : 5.5"w.c. ~ 10.5"w.c. (4"w.c. ~ 11"w.c. available) 液化氣 : 5.5"w.c. ~ 10.5"w.c. (4"w.c. ~ 11"w.c. 可選)</p> | |
| <p>Gas Inlet / Outlet Size 瓦斯進氣與出氣孔孔徑</p> | <p>1/2" NPT or 3/8" NPT 1/2" NPT 或 3/8" NPT</p> | |
| <p>Gas Side Outlet Size 側邊出氣孔孔徑</p> | <p>1/2"NPT , 3/8"NPT or No side outlet 1/2"NPT 或 3/8"NPT 或 沒有側邊出氣孔</p> | |
| <p>Ambient Working Temp. Range 應用工作溫度範圍</p> | <p>-10°F ~ 175°F (-23°C ~ 80°C)</p> | |
| <p>Dimensions 尺寸</p> | <p>122 (L) x 47(W) x 96(H) mm 長 122 x 寬 47 x 高 96mm</p> | |
| <p>Gas Flow Capacity @ 1"w.c. Pressure Drop 1"壓降時出氣流量</p> | <p>NAT. : 40,000 BTU / Hr 天然氣 : 40,000 BTU / 小時</p> | |
| <p></p> | <p>LPG: 65,000 BTU / Hr 液化氣 : 65,000 BTU / 小時</p> | |
| <p>Max. Adjustable Gas Flow Capacity 可調最大流量</p> | <p>NAT. : 70,000 BTU / Hr 天然氣 : 70,000 BTU / 小時</p> | |
| <p></p> | <p>LPG : 110,000 BTU / Hr 液化氣 : 110,000 BTU / 小時</p> | |
| <p>Min. Adjustable Gas Flow Capacity 可調最小流量</p> | <p>NAT. : 5,000 BTU / Hr 天然氣 : 5,000 BTU / 小時</p> | |
| <p></p> | <p>LPG : 5,000 BTU / Hr 液化氣 : 5,000 BTU / 小時</p> | |
| <p>Thermostat Temp. Range 恆溫範圍</p> | <p>62°F ~ 91°F (17°C ~ 33°C)</p> | |
| <p>Valve Installation Direction 閥體安裝方向</p> | <p>Acceptable Installation Direction 可安裝方向</p> | <p>Front  正向</p> |
| <p></p> | <p></p> | <p>Sideway  側向</p> |
| <p></p> | <p>Unacceptable Installation Direction 不可安裝方向</p> | <p>Upside Down  反向</p> |
| <p>Replacement Cross Reference 可取代閥體型號</p> | <p>Rxbxxxxxxx 7xxxSxx, 7xxxSRxx, 710-2xx Hydraulic Valve Rxbxxxxxxx 7xxxSxx, 7xxxSRxx, 710-2xx 恆溫閥</p> | |
| <p></p> | <p>SxT 6xx Hydraulic Valve SxT 6xx 恆溫閥</p> | |
| <p></p> | <p>Mxxtkxk GV3x Hydraulic Valve Mxxtkxk GVxx 恆溫閥</p> | |
| <p>Packaging 包裝</p> | <p>20pcs / Carton ; G.W. : 12.8kg / Carton 20pcs / 箱 ; 毛重 : 12.8kg / 箱</p> | |
| <p>Main Applications 主要應用</p> | <p>Gas Space Heater 燃氣暖氣機</p> |  |
| <p></p> | <p>Gas Fireplace 燃氣壁爐</p> |   |