
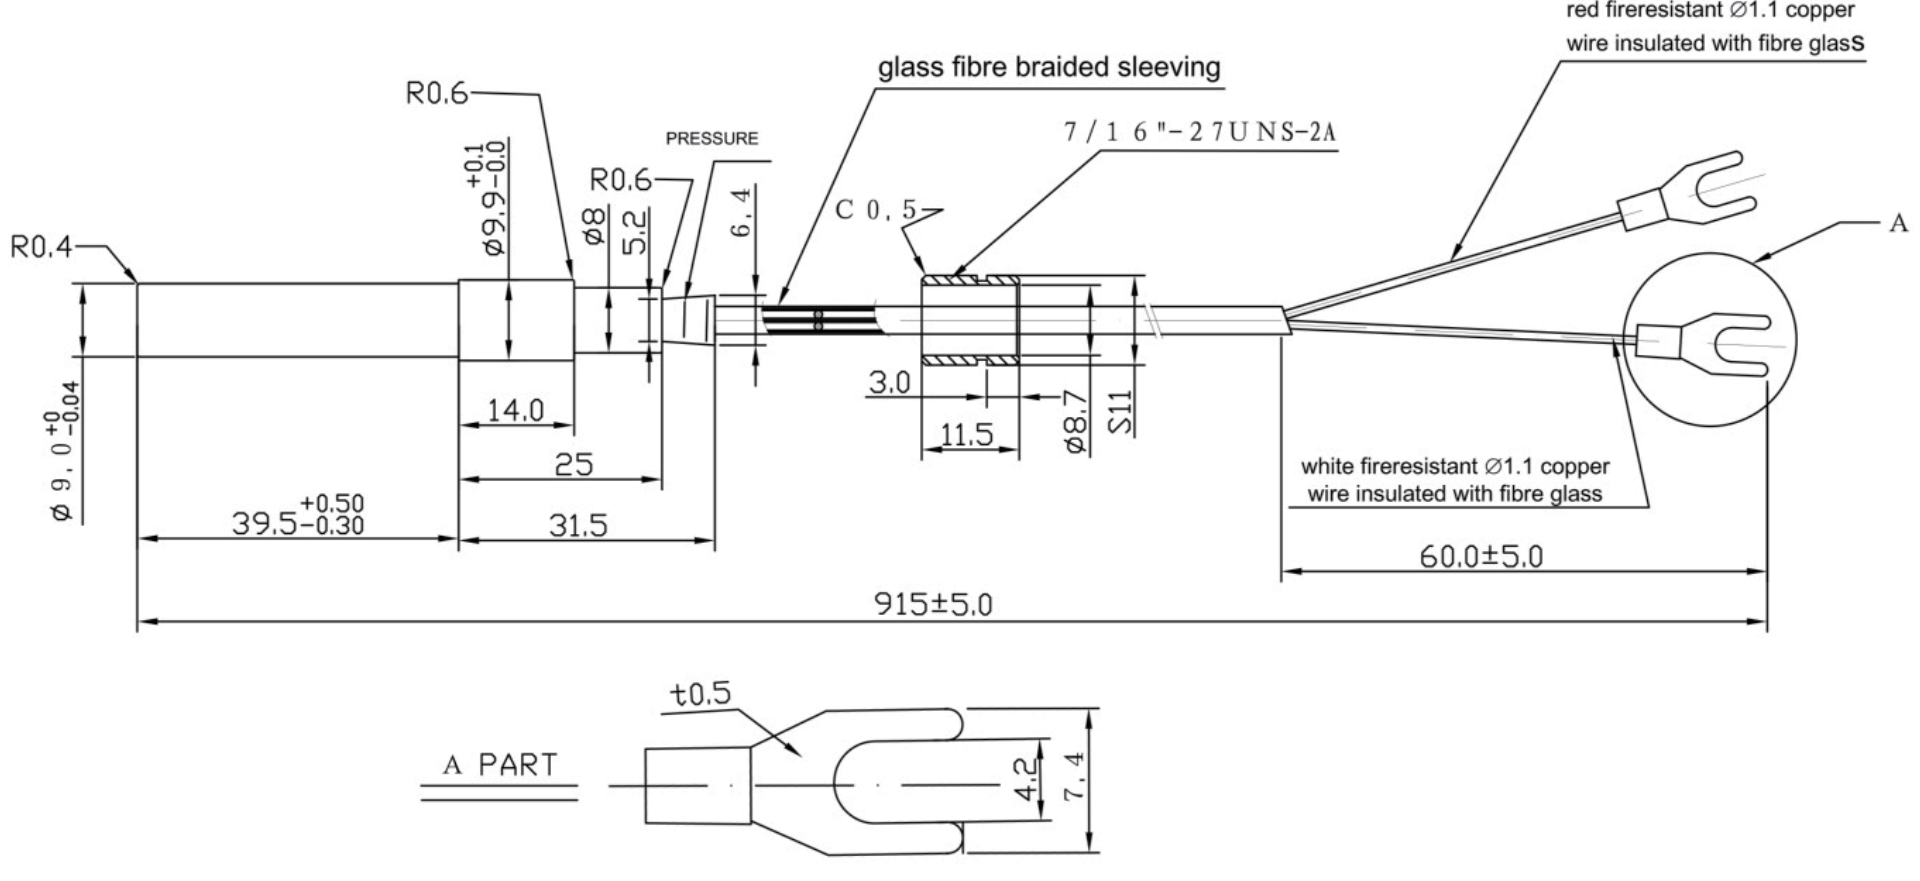



Data Sheet - Thermopile

<p>Photo 照片</p>	
<p>Dimension 尺寸</p>	
<p>Model No. 型號</p>	<p>GV5TP-0036</p>
<p>Type of Thermopile 類別</p>	<p>Thermopile 熱電堆</p>
<p>Electric Rating 電氣特性</p>	<p>750 millivolt Thermopile 750 毫伏 熱電堆</p>
<p>Length 長度</p>	<p>36"</p>
<p>Certificate 認證</p>	<p>CSA  US</p>
<p>Fixing Nut thread Size And Type 固定螺母規格</p>	<p>7/16"-27UNS-2A</p>
<p>Inner Resistance Value (Ω) 內阻值</p>	<p>3.2 Ω +/-10% (25°C)</p>
<p>Insulation Material Max. Temperature Resistance 絕緣材料最大耐溫度</p>	<p>220°C There are double layers of fiberglass sleeves on our thermopile, and it provides lead wire better protection and high temperature resistance.</p>
<p>Maximum Working Temperature 最大工作溫度</p>	<p>700°C</p>
<p>E.M.F. in Open Circuit (650°C) 起電力 (650 °C時)</p>	<p>>= 600mV 大於或等於 600mV</p>
<p>Generated Voltage Value (Within 55 seconds) 電力提升 (55秒內)</p>	<p>>=360mV</p>
<p>Min. Bending Radius 最小彎曲半徑</p>	<p>15mm</p>
<p>Type Of Connection 接線方式</p>	<p>Two-wire spade connector 出兩條線打上Y型端子</p>
<p>Packaging 包裝</p>	<p>200pcs / Carton ; G.W. : 9.5kg / Carton 200pcs / 箱 ; 毛重 : 9.5kg / 箱</p>